

EXHIBIT 1

Textile Armour

The present invention relates to textile armour and to a textile armour system which may be utilised to protect a vulnerable target, such as a vehicle, building or other object, from damage caused by a shaped-charge warhead, such as a rocket propelled grenade (RPG).

Shaped-charge warheads, such as RPGs are capable of penetrating steel and armour and, therefore, pose a particular problem for tanks and armoured personnel carriers (APC) in combat situations. A shaped-charge warhead consists of a cone shaped warhead having a quantity of explosive disposed behind a hollow space. The hollow space is typically lined with a compliant material, such as copper. When detonated the energy is concentrated to the centre of the charge and it is sufficient to transform the copper into a thin, effectively liquid, shaped-charge jet having a tip speed of up to 12kms^{-1} . The extremely high pressures generated cause the target material to yield and flow plastically, with devastating effect. To be most effective the shaped-charge has to detonate at the correct distance from the target. If it detonates too close to the target the shaped-charge jet will not have properly formed before hitting the surface and the effect will be lessened. Conversely, if the shaped-charge is detonated too far away from the target surface the shaped-charge jet will have diffused and, again, the effect is lessened.

The fact that shaped-charge warheads must be detonated at a particular distance from the target object has been commonly utilised in defence shields. By providing a preliminary shield at a short distance from the actual armour of the vehicle, or other structure, it is possible to cause the warhead to detonate at a safe distance from the actual armour, with the effect that the charge explodes between the preliminary shield and the armour. In effect, the warhead becomes a conventional grenade, rather than a shaped-charge.

Any preliminary shield which causes premature detonation of the shaped-charge will offer some degree of protection. The shield itself merely needs to cause detonation, it is not meant to act as additional armour. During World War II the German army fitted sheet metal skirts or "Schürzen" on to many of their tanks to act as a preliminary shield. In more recent times it has become common to fit so-called "slat armour" to tanks and other military vehicles. The slat armour

comprises a metal frame which is mounted at a distance of approximately 500mm from the vehicle. The frame comprises a plurality of horizontal struts or slats which are spaced apart at distance selected to prevent penetration by shaped-charge warheads. The slat armour functions as a preliminary shield, causing the premature detonation of shaped-charge warheads or, if caught
5 between slats, disabling damage of the shaped-charge. Slat armour has been used by both the British Army, on the Warrior APC and the American Army, on the Stryker APC. One disadvantage of the slat armour is that it is relatively heavy and adds a great deal of weight to the already very heavy vehicle.

10 It is the object of the present invention to overcome some of the disadvantages of the prior art, or at least to offer an alternative system for counteracting the threat posed by RPGs.

According to the present invention there is provided textile armour comprising at least one textile section and corresponding supporting means, wherein the arrangement is such that the or each
15 textile section is fully extended. The term "fully extended" describes the requirement that the or each textile section is free from sagging material when it is supported. The material should be supported at its full width, but it is not necessary for it to be taut. The reason for this requirement will be discussed in more detail below.

20 The textile armour according to the present invention is not armour in the conventional sense. Rather, it is specifically intended to be used to defend against shaped-charges, in particular to diminish the effectiveness, or cause deformation, of shaped-charges. As described above, the primary damage inflicted by a shaped-charge warhead, such as an RPG, is not caused by the explosion itself but by the shaped-charge jet which is generated. The primary function of the
25 textile armour is to deform the nose cone of the shaped-charge, thus preventing the shaped-charge jet from forming properly. Furthermore, since the textile armour is intended to be deployed at a distance in the region of 500mm from the target object which it is protecting, even if the warhead does function, the shaped-charge jet will be partly diffused when it reaches the target object. The present invention may be incorporated into armour systems to be fitted to
30 military vehicles, in much the same way as the conventional slat armour. However, the present invention offers significant advantages, particularly in terms of weight reduction.

Preferably, the or each textile section comprises a net formed from a plurality of interconnecting net strands. The interconnecting net strands define a net mesh which may be of a variety of different shapes. The net mesh may be square, rectangular, triangular, circular, pentagonal, hexagonal octagonal or a combination of any of these shapes. The foregoing list is not exhaustive and the net mesh may conveniently be of any regular or irregular shape which may be formed into a net.

The objective of the textile armour is to prevent the shaped-charge jet from forming. When the or each textile section is in the form of a net the nose cone of the RPG will normally be received in a net mesh of the net. The nose cone is typically made from aluminum and the circumference of the net mesh will be selected such that it is smaller than the maximum circumference of the nose cone, such that the RPG cannot pass straight through the net. As it approaches the net the tip of the cone enters the net mesh. However, since the circumference of the net mesh is smaller than the circumference of the nose cone, the net mesh begins to tighten against the nose cone as it passes through, causing the net to strangle the nose cone. As mentioned above, the nose cone is hollow and the strangulation causes the nose cone to crumple, which in turn causes the firing mechanism to fail and prevents the shaped-charge jet from forming. Once the nose cone has been strangled the remainder of the RPG acts on the net mesh and will typically cause the mesh to break. However, the damage caused by the body of the RPG will only be that of a high speed projectile, which is not comparable to the potential damage caused by a shaped-charge. In most cases it will be necessary to repair or replace the textile armour after it has been hit. This is also the case in respect of the currently available slat armour.

It is preferred that the or each net section is supported at or near at least two adjacent corners, such that the body of the net hangs below. Extensive testing has revealed the surprising result that the net does not require to be securely supported in order to be effective. In a typical example, a RPG will be travelling at velocities up to 300ms^{-1} . Without wishing to be bound by theory, it is believed that in the time-frame in which the net acts on the nose cone, the cone will be strangled before the load has had a chance to be transferred to the perimeter of the net. In tests conducted using slow motion cameras it has been possible to view the interaction between the net and the RPG. As mentioned above, the nose cone crumples when the net mesh tightens

around it. This renders the fuse inoperable and prevents formation of the shaped-charge jet. The remainder of the RPG then breaks through the net. It has been shown that at lower projectile velocities (in the region of 150ms^{-1}) the RPG may be "caught" by the net and catapulted back. However, in order for this to happen the net must be securely supported by a strong frame.

5

10

The net strands may conveniently comprise plastic fibres. It is preferred that the plastic fibres are synthetic plastic fibres and have one or more of the following properties: high tenacity; low elongation; high strength to weight ratio; low density; and soft finish. As will be discussed in more detail below, it is desirable for the net strands to be thin. Consequently, suitable fibres must be high strength and high tenacity in order to perform the desired function. Similarly, the fibres must be made of a relatively low elongation material. If the fibres were made of a high elongation material then they would stretch on impact and may allow the nose cone to pass through and impact with the target. In order to improve handling it is desirable for the textile armour to be as light as possible.

15

20

Extensive testing has revealed that it is desirable for the fibres to be high strength but with a "soft and fluffy" finish. Although the term "soft and fluffy" does not describe technical features of the fibres it describes a desirable characteristic of them. In the event that a nose cone of a RPG hits one of the net strands directly it is preferred that the fibre is deflected and the nose cone continues into a net mesh, rather than firing and forming a shaped-charge jet. If the net strand has a "hard" finish then the possibility exists that the RPG will fire. It is therefore preferred that the fibres do not have a "hard" or resilient surface finish.

25

Although it is desirable for the fibres to have a "soft" finish, they must also be high strength and high tenacity as they need to be capable of strangulating the nose cone of a shaped-charge warhead before they fail. The net strands may suitably comprise ultra high molecular weight polyethylene fibres, such as Dyneema®. Alternatively, the net strands may be made from other high-strength man-made fibres, such as Kevlar®, Spectra® or any other suitable material.

30

Traditional nets tend to have knotted intersections where net strands are knotted in order to form the net mesh. It has been discovered that these knots form so-called "hard" surfaces which may

cause a RPG to fire if it impacts directly onto the knot. Consequently, if a knotted construction is used then it is preferred that the knot is as small as possible to reduce the likelihood of a direct hit occurring.

5 The net preferably comprises a knotless mesh construction. Alternatively, the net may comprise a woven construction. In both of these constructions the intersections between nets strands are much less likely to cause a shaped-charge to fire if a direct hit occurs. It is believed that the particular construction of the net does not play any particular role in disabling the shaped-charge. The only consideration for the net construction is that the intersections are as small and "soft"
10 as possible.

As discussed above, the primary function of the net strands is to strangle the nose cone of a shaped-charge warhead and prevent it from firing. In order to perform this function it is preferred that the net strands are as thin as possible in order to increase the likelihood of the nose cone
15 entering one of the net meshes, rather than hitting one of the net strands. It is a requirement of the invention that the net is "fully extended". The term "fully extended" describes the requirement that net is free from sagging material when it is supported. If the net material was permitted to sag then it would tend to bunch up, thus increasing the likelihood of a warhead hitting the net strands. Consequently, the net material should be held at its full extension,
20 although it need not necessarily be taut.

As mentioned above, it is conceivable that if the tip of the nose cone hit directly onto one of the net strands then this may cause the RPG to fire. However, even if this was to happen the textile armour would still provide some protection as it will normally be located at least 50cm from the
25 target object which it is shielding. Consequently the shaped-charged jet will be formed at least 50cm from the target and its effectiveness will be decreased.

It is preferred that the net strands have a diameter of less than 10mm. More preferably, the net strands may have a diameter of less than 6mm. The only limiting factor to the diameter of the net
30 strands is the availability of materials from which to manufacture them. Ideally the net strands will have as small a diameter as possible. Using currently available materials it is preferred that

5

10

15

25

that the optimum circumference of each mesh section is two-thirds of the maximum circumference of the nose cone of the RPG which the net is designed to disable.

As discussed above the RPG-7 propels a warhead with a maximum diameter of 85mm. The maximum circumference of such a warhead will be approximately 267mm. Consequently, the optimum circumference of each mesh section in a textile armour designed to counteract the RPG-7 would be approximately 178mm. In the case of a square net mesh this would require sides of approximately 45mm. In the case of a square or rectangular net mesh the sides will typically be in the range from 20-100mm.

It is preferred that the supporting means comprises a rigid support member. As discussed above, the net only requires minimal support in order to function. However, a rigid support member helps to ensure that the net is held in a "fully extended" manner. The rigid support member may conveniently be a frame structure.

The support member may be of a variety of shapes and its primary function is to suspend the textile section in order to provide a shield for a target object, such as a tank or APC, a building, a stockpile of munitions, a person or persons or anything else which may be subjected to enemy fire. The rigid support member may conveniently be a frame structure. The frame structure may be square, rectangular, circular, triangular, arched, pentagonal, hexagonal or any other regular or irregular shape which is capable of supporting a textile section. For example, the frame structure may comprise two upright posts connected by a cross bar.

The textile section may be suspended from a portion of the support member, such that it hangs down, or it may extend between two points on the support member, such that it is held taut.

It is preferred that the textile section is attached to the supporting member at a plurality of attachment points, and more preferred that the attachment points are evenly spaced along the supporting member.

The attachment between the textile section and the supporting member may be effected using any

suitable attachment means, as will be easily understood by the person skilled in the art. The attachment may be permanent, semi-permanent or breakaway, and each attachment type has different properties which will be selected by the user. As discussed above, the primary objective for armour designed to counteract RPGs is to disable the warhead.

5

Although the net does not require support to function it is preferred from an operational point of view. It is envisaged that the textile armour will be fitted to armoured personnel carriers (APC) and the like in a similar manner to conventional slat armour. Fitting and replacement of the textile armour will be more easily facilitated if the textile armour is held within a frame.

10 Although the frame need not provide support for the net in disabling RPGs, it must be strong enough to handle the daily wear and tear to which it will be subjected. For example, when it is fitted to an APC it is likely that the frame will be utilised by soldiers to enable them to climb on top of the APC.

15 In order to improve the functionality of the textile armour system it is preferred that the textile sections are provided with a camouflage colouring. More preferably, the textile sections may also be provided with a suitable camouflage garnish to compliment the colouring of the surroundings in which the system will be used. The use of such camouflage is well known.

20 According to a second aspect of the present invention, there is provided a textile armour system comprising a plurality of textile sections and a plurality of corresponding supporting means, wherein the arrangement is such that each textile section is fully extended.

25 The plurality of supporting means may conveniently comprise frame structures which may be connected together to form a framework of interconnected support members. The support members offer structural and inertial support for the system. The framework may be anchored to the ground, vehicle or other structure by any suitable means or secured in any other suitable way. The framework must be capable of providing the necessary support under impact from projectiles, such as RPGs. Although the textile armour is capable of disabling an RPG without
30 support from a frame structure it has been shown that at lower velocities a frame structure can be helpful.

5

10

Fig. 1 shows a front view of a textile armour;

15

Fig. 3 shows a schematic sectional view of the textile armour of Fig. 1, after impact of a RPG warhead.

20

25

30

UK CONFIDENTIAL

Any suitable high-strength yarn may be used, in particular high-strength man-made fibres. For example, the net strands may be made from other high-strength man-made fibres, such as Kevlar®, Spectra® or any other suitable material which exhibits the desired properties. As discussed above, it is desirable for the net strands to have a “soft” finish. This does not mean that the net strands will break when hit by a high velocity projectile, rather it means that the projectile will push the net strand aside easily.

The net mesh is a square mesh with a mesh knot to knot size, or mesh dimension, of approximately 45mm. The mesh knot to knot size must be small enough to ensure that RPGs are not permitted to pass through the net mesh 4 and this requirement will be discussed in more detail below. Although the mesh dimension is defined in relation to the “mesh knot to knot size”, the net is actually constructed using a knotless intersection construction. The knot to knot size merely refers to the dimension of one side of the square net mesh. Although a square net mesh is utilised it is possible to manufacture the textile armour 2 using any shaped mesh, so long as the mesh size permits the textile armour 2 to function.

The operation of the textile armour 2 will be described in more detail in relation to Figs. 2 and 3. However, a key feature of the textile armour 2 is the size of each individual mesh section. Each individual mesh section is defined as the shape defined by the interaction of the net strands 5, 6, which is square in the present case. Although the textile armour 2 may be utilised to counter the threat posed by more than one size of RPG, each net will be most effective against a particular size of RPG. In order to disable an RPG the textile armour 2 must be able to strangle the nose cone. Consequently, the circumference of each section of net mesh is preferably no greater than two-thirds of the maximum circumference of the particular RPG.

In the present example the textile armour 2 is designed to disable an RPG-7 warhead. The RPG-7 warhead has a maximum diameter of 85mm and a circumference of approximately 267mm. In order to ensure that the warhead is disabled the circumference of each individual mesh section

10

must be approximately 178mm, which equates to a square mesh with sides of approximately 45mm. Alternatively, it would be possible to use a rectangular mesh with sides of 60mm and 30mm.

- 5 The braid diameter of the net strands is 4.5mm. It is preferred that the diameter of the net strands is as small as possible to limit the possibility of an RPG hitting a net strand.

10 The net mesh 4 is attached to a frame 7 by any suitable means. The net mesh is attached to the frame 7 at a plurality of points around the inner periphery of the frame 7. Testing has shown that at most velocities the frame structure 7 plays no part in disabling the RPG warhead. In fact, it is believed that at a velocity of 300ms^{-1} the warhead is disabled and the RPG has broken through the net mesh 4 before the load is transmitted to the frame 7. The frame 7 is manufactured from box steel. Although it plays no part in disabling the warhead it is preferred that the frame 7 is strong and resilient as it will typically be deployed in war time situations, such as additional
15 armour for an APC, and it is likely to be subjected to some rough treatment, e.g. soldiers will climb on it. The frame 7 is provided with means (not shown) for connecting it to further frames in order to create armour of varying sizes to suit different applications. The frames 7 must be easy to replace as they will require repair when hit.

- 20 Referring now to Fig. 2, a RPG 12, is shown travelling towards the textile armour 2, in a direction perpendicular to the plane of the textile armour 2. The textile armour 2 is deployed at a distance of 500mm from the target object 10, which may be an APC. The operation of the textile armour 2, as a result of the impact of the RPG 12, will be described with reference to Fig. 3.

25 Fig. 3 shows the result of the impact of a RPG 12. The RPG 12 is an RPG-7 and has a maximum diameter of 85mm and a typical velocity of 300ms^{-1} . As discussed above, the nose cone of an RPG is hollow and is typically made from aluminium. The net strands 5, 6 of the net mesh 4 are very thin and there is more fresh air than material in the textile armour 2. This means that in
30 normal circumstances there is a far greater likelihood that the tip of the nose cone 11 of the RPG 12 will enter into the space defined by a net mesh 4, rather than hit one of the net strands 5, 6. The circumference of each individual mesh section is approximately two-thirds of the

5

10 In an alternative scenario the RPG 12 may hit directly onto one of the net strands 5, 6. The net strands 5, 6 are manufactured from a low density material with a “soft” finish and it is believed that when a direct hit occurs the net strand 5, 6 deforms out of the path of the RPG 12 tip and allows it to continue into a net mesh 4.

15 The textile armour 2 may be combined with other frame sections 7 to form a larger textile armour system. The textile armour system of the present invention is a versatile system which may be adapted to suit the needs of the user. The basic components of textile sections 4 attached to support members 7 may be combined in a variety of different ways to provide protection for a variety of objects 10. The many possible variations will be easily understood by the skilled

20 person and the given examples merely show one possible embodiment.

Claims

1. Textile armour comprising at least one textile section and corresponding supporting means, wherein the arrangement is such that the or each textile section is fully extended.

5

2. Textile armour according to claim 1, wherein the or each textile section comprises a net formed from a plurality of interconnecting net strands.

10

3. Textile armour according to claim 2, wherein the or each net is supported at or near two adjacent corners, such that the body of the net section hangs below.

4. Textile armour according to claim 2 or claim 3, wherein the net strands comprise plastic fibres.

15

5. Textile armour according to claim 4, wherein the plastic fibres have one or more of the following properties: high tenacity; low elongation; high strength to weight ratio; low density; and soft finish.

20

6. Textile armour according to claim 4 or claim 5, wherein the net strands comprise ultra high molecular weight polyethylene.

7. Textile armour according to any one of claims 2-6, wherein the net comprises a knotted construction.

25

8. Textile armour according to claim any one of claims 2-6, wherein the net comprises a knotless mesh construction.

9. Textile armour according to any one of claims 2-6, wherein the net comprises a woven construction.

30

10. Textile armour according to any one of claims 2-9, wherein the net strands have a diameter of less than 10mm.

11. Textile armour according to claim 10, wherein the net strands have a diameter of less than 6mm.

12. Textile armour according to claim 11, wherein the net strands have a diameter in the region from 3-5mm.

13. Textile armour according to any preceding claim, wherein the armour is configured to disable a shaped charge warhead.

14. Textile armour according to claim 13, wherein the shaped charge warhead is a rocket propelled grenade.

15. Textile armour according to claim 13 or claim 14, as dependent on any one of claims 2-12, wherein the circumference of each individual mesh section is less than the maximum circumference of the nose cone of the shaped charge warhead which the net is designed to disable.

16. Textile armour according to claim 15, wherein the circumference of each individual mesh section is less than, or equal to, two-thirds of the maximum circumference of the nose cone of the shaped charge warhead.

17. Textile armour according to any preceding claim, wherein the supporting means comprises a rigid support member.

18. Textile armour according to claim 17, wherein the rigid support member is a frame structure.

19. Textile armour according to claim 17 or claim 18, wherein the textile section is attached to the support member at a plurality of attachment points.

20. Textile armour according to claim 19, wherein the attachment points are evenly spaced along the support member.

21. Textile armour according to any preceding claim, wherein the or each textile section is provided with a camouflage colouring.

22. Textile armour according to any preceding claim, wherein the or each textile section is provided with a camouflage garnish.

23. Textile armour according to any preceding claim, wherein the textile armour is capable of disabling a projectile with a velocity up to 300ms^{-1} .

24. A textile armour system comprising a plurality of textile sections and a plurality of corresponding supporting means, wherein the arrangement is such that each textile section is supported in a substantially wrinkle-free manner.

25. A textile armour system according to claim 24, wherein the supporting means comprise rigid frames, each frame being connected to another frame.

26. A textile armour system according to claim 25, wherein the frames provide structural and inertial support for the system.

27. A textile armour system according to any one of claims 24-26, comprising textile armour according to any one of claims 1-23.

28. A textile armour system according to any one of claims 24-27, wherein the system is deployed to provide a screen between a target object and an incoming projectile.

UK: CONFIDENTIAL

Abstract

Textile armour (2) comprising at least one textile section (4) and corresponding supporting means (6), wherein the arrangement is such that the or each textile section is fully extended.

5

(Fig. 1)

10

~~CLASSIFIED BY 6916~~
~~UK CONFIDENTIAL~~

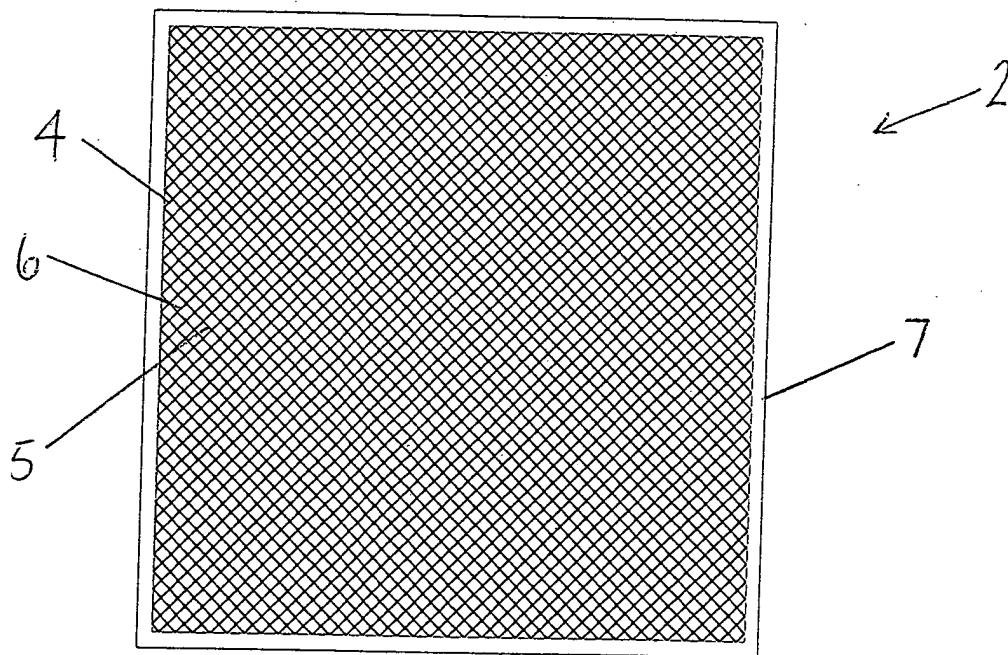
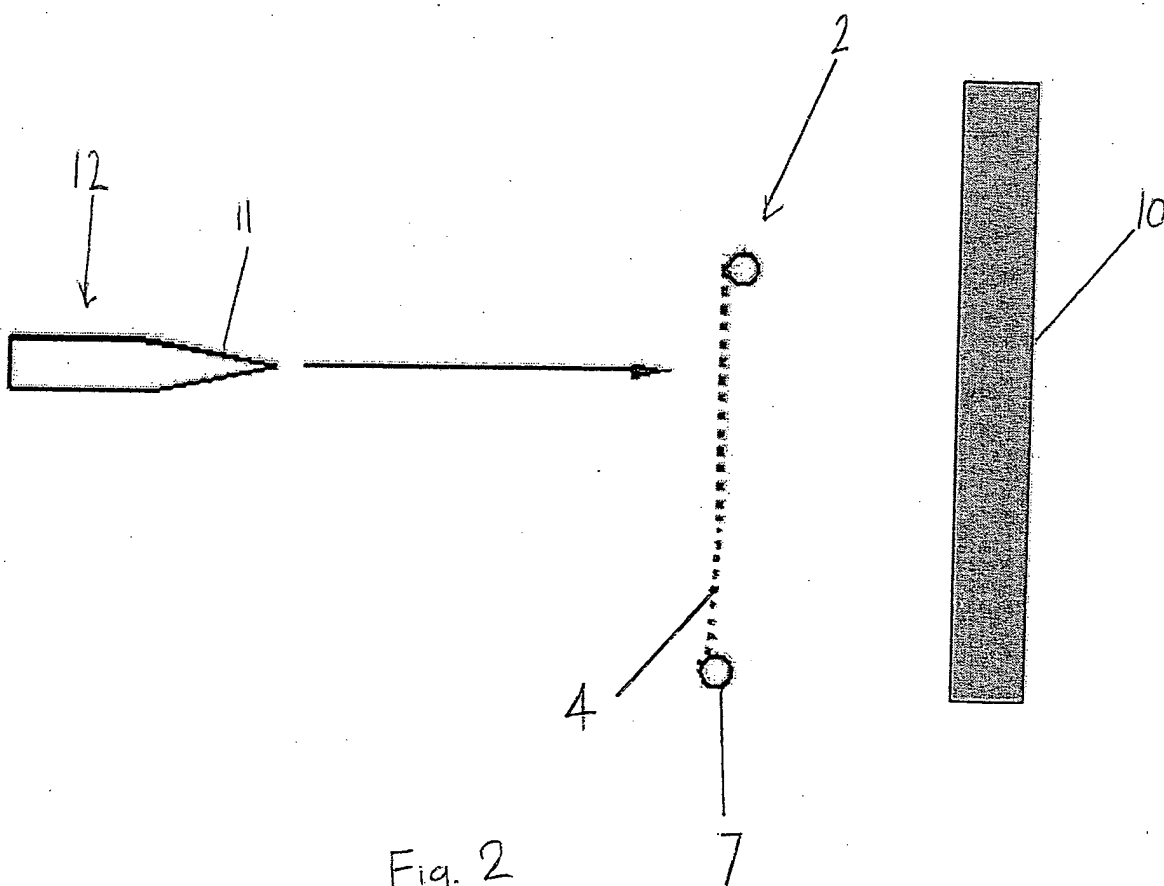


Fig. 1



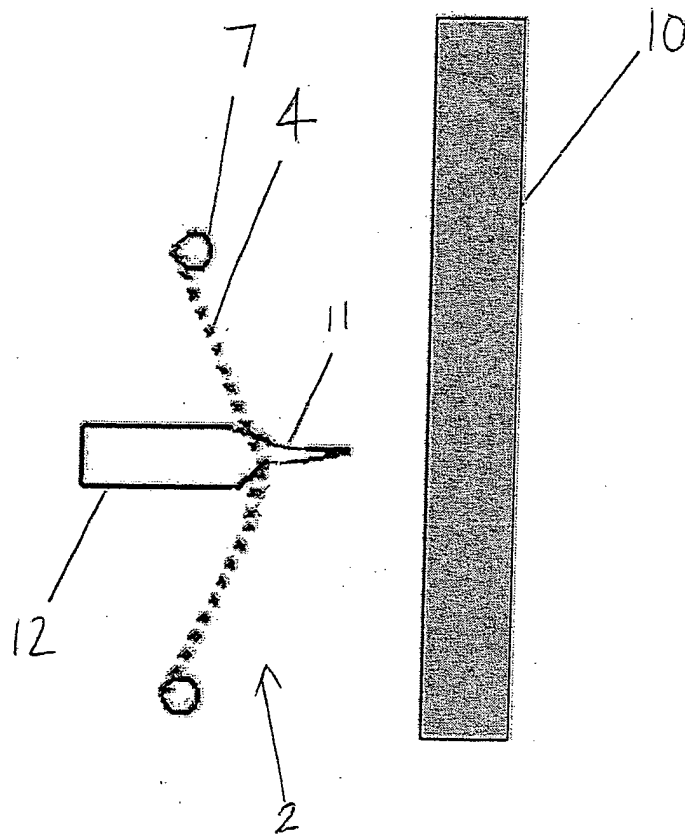


Fig. 3